


Wolfmix W1

Wolfmix W1 is a standalone performance DMX lighting controller designed for creating light shows on the fly without a computer.

A toolbox of FX modules, music sync, and up to 4 DMX universes - packed inside robust hardware with a powerful processor. Choose from 1000's of light fixtures, or build your own directly inside the controller. Whether it's for a live performance, disco, club or show - Wolfmix has you covered.



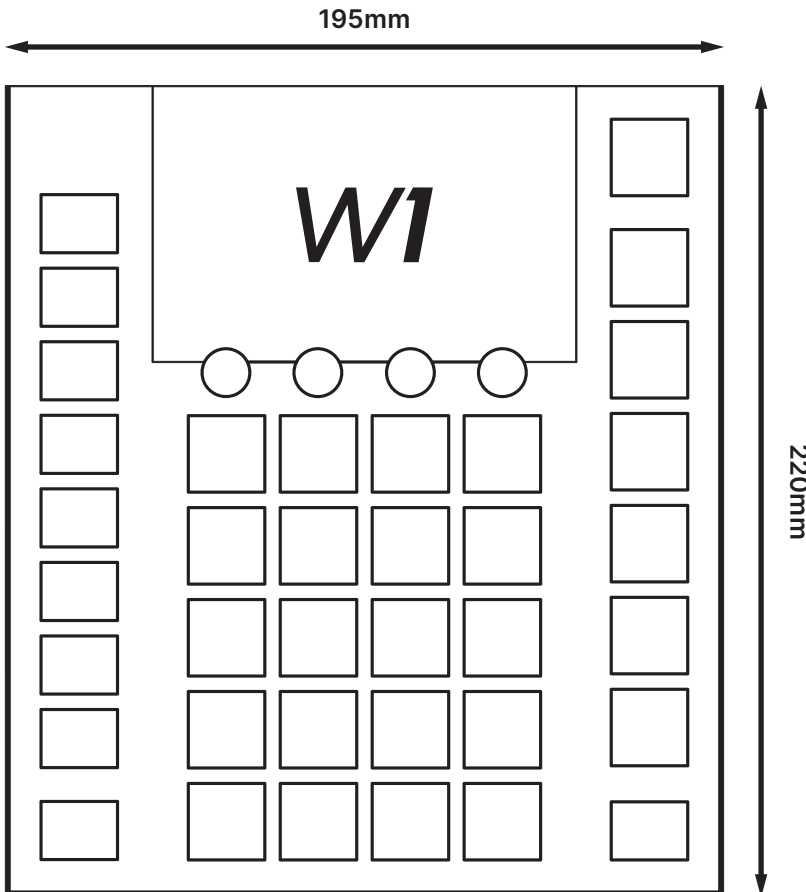

Size & weight

- 195 x 220 x 62 mm / 7.68 x 8.66 x 2.44 in
- 1070g / 2.36lb

Housing

- ABS Plastic
- Powder-coated steel base plate with 100mm VESA (M4 6mm max)
- Powder-coated steel reinforced back plate

Display

- 4.3" Color TFT with tinted glass
- Capacitive touch

Encoders

- Full body alloy
- Incremental push with acceleration

Button pads

- 37 Silicone buttons with matt oil finishing
- LED color backlit

Processing

- 220Mhz CPU with ARM core
- 8MB RAM
- 16MB Flash

Audio

- Omnidirectional electret mic
- 3.5mm Jack Line-In
- Analog adaptive peak detector

DMX

- 2x 3pin DMX OUT XLR connectors
- 1x 5pin DMX OUT XLR connector
- 1x 5pin DMX IN/OUT XLR connector with WLINK

USB

- USB-B connector- 900ma required (USB3 rating)
- High-speed USB communication

