

A15 WIDE

MEDIUM THROW LINE SOURCE




A15 Wide is a medium throw loudspeaker designed for production applications. Part of the multifunctional A15 family, the passive 15" enclosure offers exceptional deployment flexibility and simplicity without compromising performance.

The 30° enclosure of A15 Wide enables a compact array to provide expansive coverage while preserving sightlines. Panflex allows users to adapt the directivity to the audience geometry and ensure exceptional frequency response stability.

Combinations of A15 Wide and A15 Focus can be flown or stacked to form a vertical line source. A15 Wide deploys radially to offer broad horizontal coverage, particularly suited for infill and side-fill applications on large stages. A15 Wide can also be used individually as a configurable directivity point source for delays and pole-mounted applications.

A15 Wide provides the low frequency contour of a large concert system and KS21 subwoofer further reinforces the contour and extends the bandwidth to 29 Hz.


A15 Wide is a highly scalable solution that delivers concert level performance for small to large events or supplements a larger L-Acoustics solution for the world's biggest stages.




SPECIFICATIONS

Description	2-way passive constant curvature WST 30°, amplified by LA4X / LA8 / LA12X
Usable bandwidth (-10 dB)	42 Hz - 20 kHz ([A15])
Maximum SPL¹	141 dB ([A15])
Nominal directivity	Enclosure: 30° Panflex: 70°/110° symmetric or 90° asymmetric
Transducers	LF: 1 x 15" neodymium cone driver HF: 1 x 3" diaphragm neodymium compression driver
Acoustical load	LF: Bass-reflex, L-Vents HF: DOSC waveguide, Panflex
Nominal impedance	8 Ω
Connectors	IN: 1 x 4-point speakON LINK: 1 x 4-point speakON
Rigging and handling	Flush-fitting two-point rigging system 2 handles, 8 corner stops and 2 ground runners
Safety	1 DIN580-compatible M8 insert
Weight (net)	33 kg/73 lb
Cabinet	Premium grade Baltic beech and birch plywood
Front	Coated steel grill Acoustically neutral 3D fabric
Rigging components	High grade steel with anti-corrosion coating
Finish	Dark grey brown Pantone 426 C
IP	IP55


1- Peak level at 1 m under free field conditions using pink noise with crest factor 4 (preset specified in brackets).



Front



Side

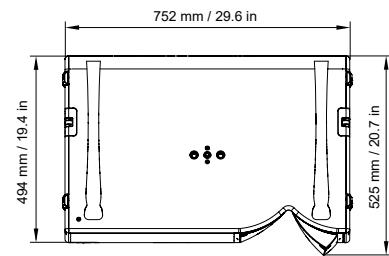

Top